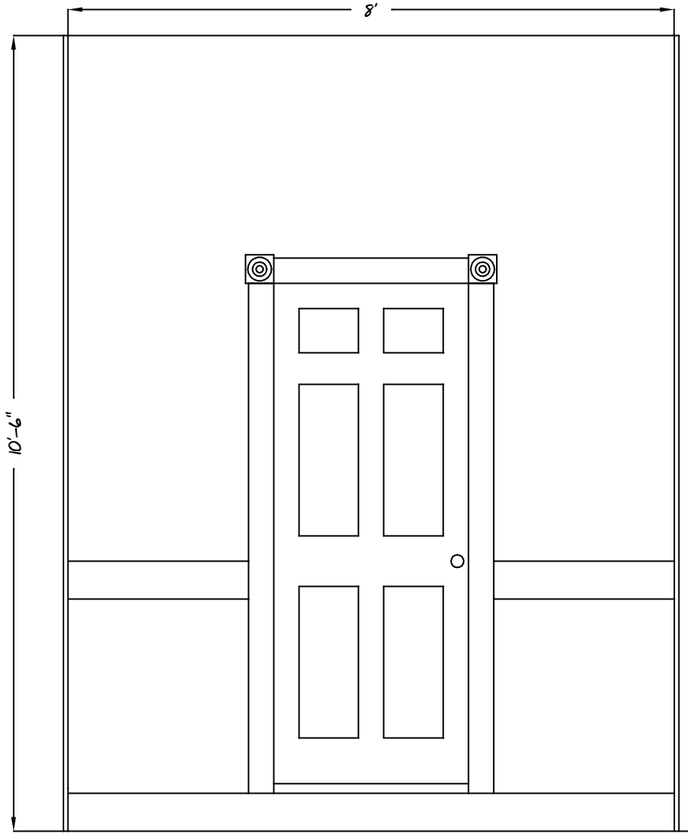

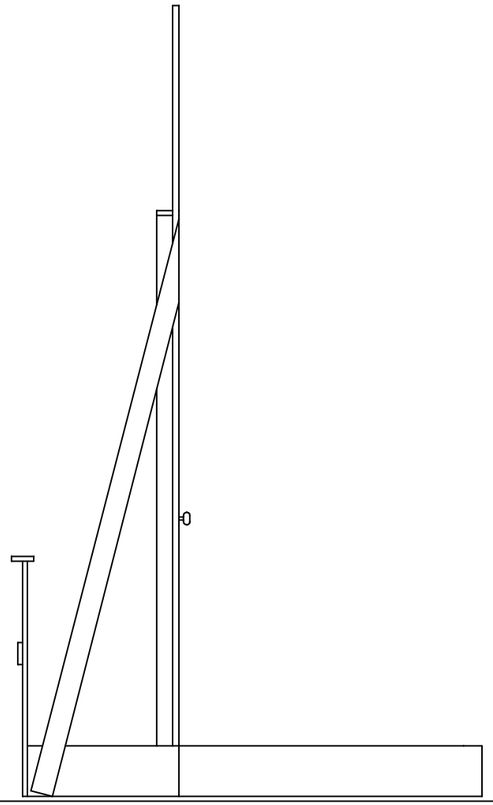

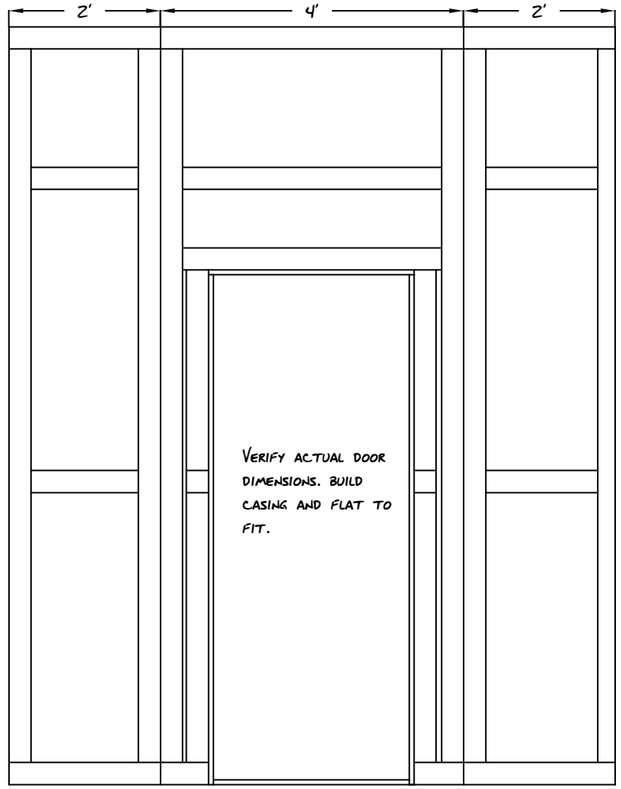

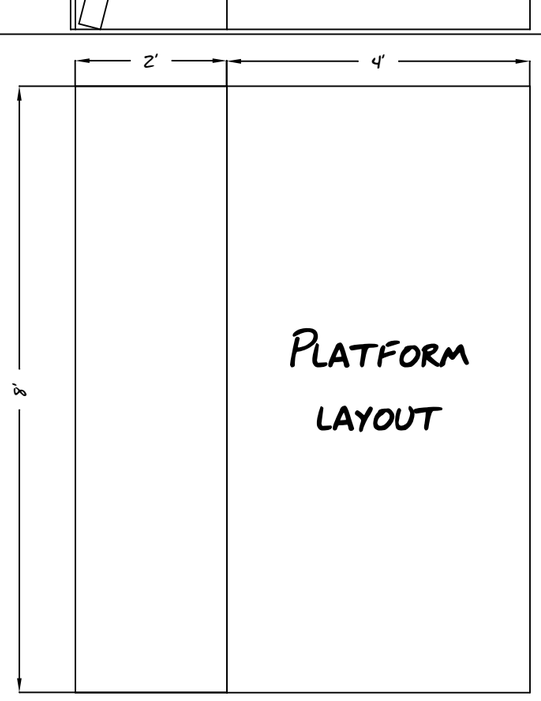

PLATFORM LAYOUT

NOTES FOR FLAT CONSTRUCTION:

1. VERIFY LUMBER DIMENSIONS AND ADJUST STILE AND TOGGLE DIMENSIONS AS NECESSARY.
2. TYPICAL CORNER BLOCK AND KEYSTONE PLACEMENT IS $\frac{3}{4}$" FROM EITHER EDGE.
3. ENSURE THAT FLAT IS SQUARE BY MEASURING THE DIAGONALS.
4. GLUE CORNER BLOCKS AND KEYSTONES. STAPLE USING $\frac{3}{4}$" X $\frac{1}{4}$"-CROWN STAPLES.
5. ENSURE THAT GRAIN CROSSES THE JOINT IN THE PERPENDICULAR OR ON AND ANGLE.

BISHOP MCNAMARA HIGH SCHOOL
FINE ARTS AND THEATRE
PRESENT



DIR. KAMIL HAZEL	10/16/2024	2 / 6
DES. G.D. GEORGE	1/2"=1'-0"	

FRONT DOOR UNIT GENERAL