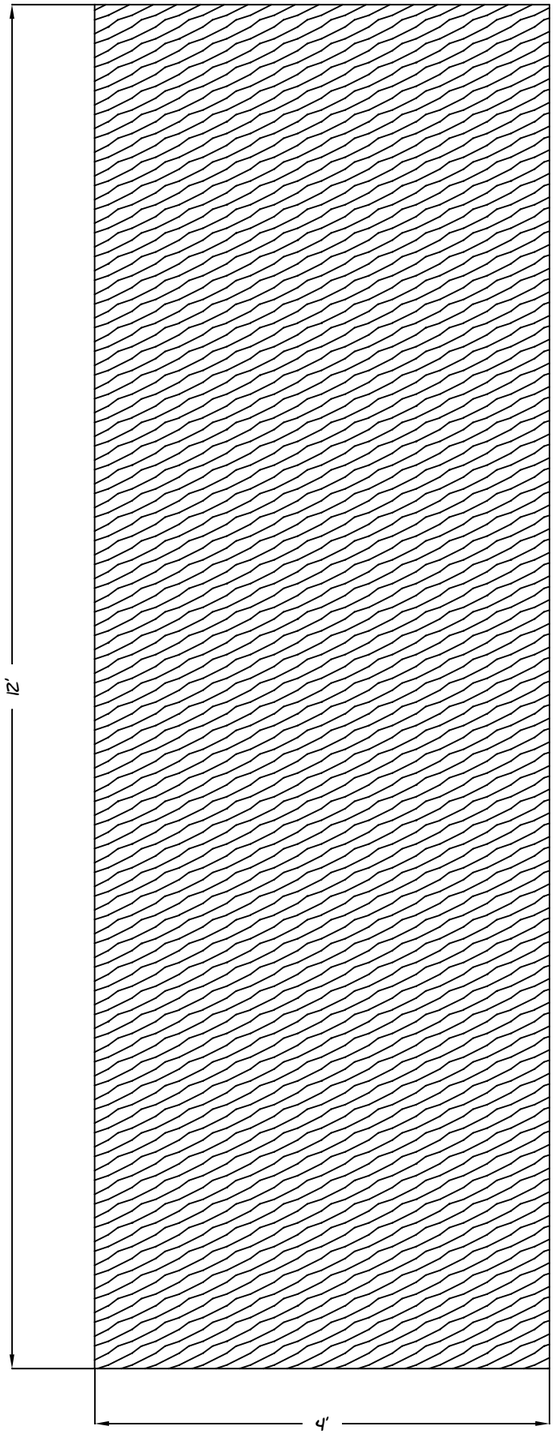

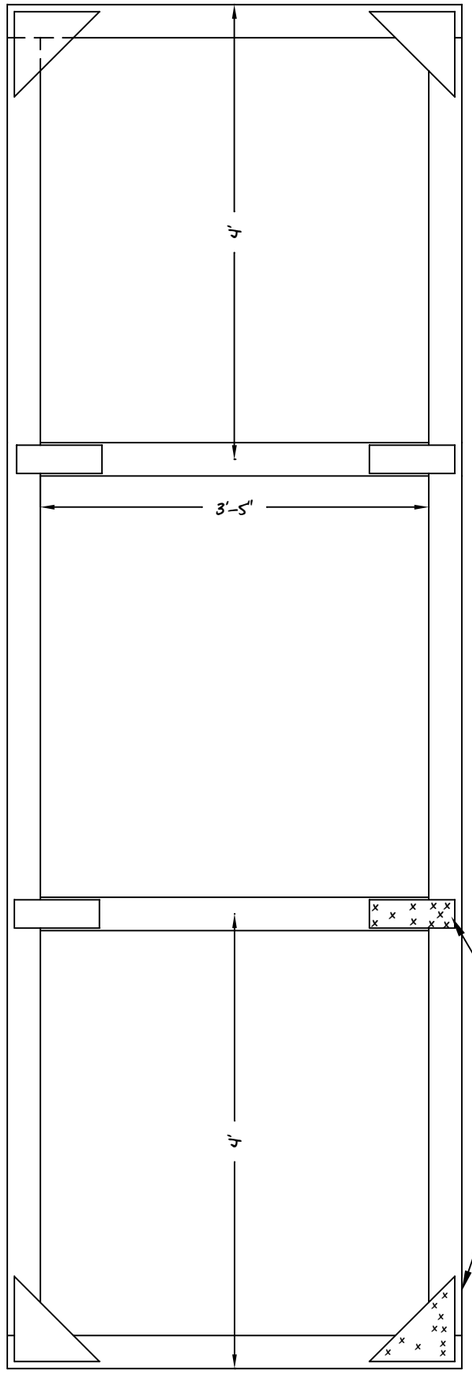

Typical corner block and keystone placement is $\frac{3}{4}$" from either edge.

Verify lumber dimensions and adjust stile and toggle dimensions as necessary

Glue and staple using typical staple pattern, cornerblocks and keystones

Notes

- Build 4@4'x12'
- Build 6@1'x12' for the returns
- Pull remaining flats from stock

0 1' 2' 3' 4'

Bishop McNamara High School
Fine Arts and Theatre
present

LITTLE SHOP OF HORRORS

Dir. Hazel	8/5/2026	4/5
Des. George	McKinnon	1/4"=1'-0"	

Typical Flat Construction